

HWT-M2150-10-EGI

1T 5MP IR AI Bullet Camera



Features

- ▶ 1 TOPS computing power
- ▶ Supports behavior analysis, crowd flow analysis, target detection, and person detection
- ▶ 1/2.7" CMOS sensor
- ▶ 120 dB super wide dynamic range (WDR), ensuring that both foreground and background objects are clearly identified in environments with sharp light contrast
- ▶ Supports auto iris

Technical Specifications

Model		HWT-M2150-10-EGI				
Major Specifications						
Main control	Computing power	1 TOPS				
	Memory	DDR3 0.5 GB				
	Flash type	SPI NAND Flash 256.0 MB				
Camera	Focal length	2.8-12mm				
	Max Aperture	F1.6 (W) to F3.4 (T)				
	Image sensor	1/2.7" CMOS/5MP 2560(H)*1920(V)				
	Lens aperture type	DC-Iris				
	Angle of view	Horizontal: 30.6° (T) to 94° (W); vertical: 24° (T) to 70° (W)				
	IR range	50m				
	Digital Zoom/Optical zoom	Not Supported/4X				
	DORI (Complied to the EN 62676-4)		D(m)	O(m)	R(m)	I(m)
		W	70.0	28.2	14.0	7.0
		T	192.0	77.4	38.4	19.2
Intelligence						
Target/Body	Target	Target detection				
	Person	Person detection				
Other intelligences	Behavior analysis	Fast movement/Tripwire crossing/Intrusion/Area entry or exit /Loitering				
	Crowd flow analysis	Queue length/Head counting/Crowd flow statistics				
	Defocus	Supported				
Open ecosystem						
Data openness	Data openness	SDK (proprietary protocol)/REST API (proprietary protocol)/GA/T 1400/GB/T 28181 (2011, 2016)				
Image						
Codec	Video encoding format	MJPEG/H.264/H.265				
	Video encoding channels	Triple streams				
	Intelligent encoding	Extra265/264				
	Video frame rate	5-megapixel: 20 fps; < 5-megapixel: 30 fps or 25 fps				
Image ISP	Min illumination	Color: 0.005 lux (F1.2, AGC ON, 1/30s shutter speed); B/W: 0.0005 lux (F1.2, AGC ON, 1/30s shutter speed) or 0 lux (infrared illuminator enabled)				
	Day/Night mode	Supported; automatic (ICR)/Color/B/W (default: automatic) Sensitivity level: high (default), medium, and low Image triggering /Internal triggering				
	WDR	120 dB				
	White balance	Auto/Manual/OnePush				
	HLC/BLC	Supported/Supported				
	Digital noise reduction	2D/3D noise reduction				
EIS	Supported Sensitivity levels are not supported.					


Image ISP	Shutter speed	Slow shutter level: 1/3,1/4,1/8,1/12,1/15; Non-slow shutter level: 1/25,1/30,1/50,1/60,1/90,1/100,1/120,1/125,1/180,1/250,1/350,,1/500,1/725 ,1/1000,1/1500,1/2000,1/3000,1/4000,1/6000,1/10000,1/30000,1/100000;; Default value: 1/25
	Signal-to-Noise Ratio(SNR)	>45dB
	Primary stream resolution	2560×1920(5MP),2560×1440(4MP),2048×1536(3MP),1920×1080(1080 P),1280×720(720P)
	Secondary stream resolution	Secondary stream 1: 720×576(PAL), 720×480(NTSC), 352×288(PAL), 352×240(NTSC) ; Secondary stream 2: 352×288(PAL), 352×240(NTSC)
	Video bit rate	Only for H.264 and H.265 1080P-4K 512Kbps - 16Mbps 720P 384Kbps - 8Mbps D1 256K - 4Mbps CIF 32K - 1Mbps
	Smart Illumination	Not Supported
	Optical Defogging/Algorithm-assisted Defogging	Not Supported/Supported

Audio		
Audio	Audio Encoding Format	G.711a/G.711u/G.726/OPUS
	Audio sampling rate	G.711a/G.711u/G.726:8K OPUS:8K/12K/16K/24K/48K
	Audio bit rate	G.711a/G.711u:64kbps G.726:16 kbit/s, 24 kbit/s, 32 kbit/s, or 40 kbit/s 16/24/32/40/64/96/128/160/192/224/256/288Kbps: configurable



Networking		
Network transmission	Protocols supported by IPv4	TCP, UDP, IPv4, DHCP, DNS, ICMP, IGMP, HTTPS, FTP, SFTP, RTP, RTSP, RTCP, SIP, ARP, SSL, NTP, SNMP (V1/V2/V3), 802.1x, QoS, SMTP, and PPPoE. Note: The northbound protocol needs to adapt to the PPPoE dialup scenario.
	Protocols supported by IPv6	HTTPS,RTP,RTCP,RTSP,Onvif,IPv6,ICMPv6,DHCPv6

Security		
Data security	Media security	Supports web- or SDK-based media stream encryption. By default, RTSP uses MD5 digest authentication. Supports encrypted storage of up to two channels of streams. By default, RTSP uses MD5 digest authentication. Supports encrypted storage of data in SD cards. By default, RTSP uses MD5 digest authentication . By default, RTSP uses MD5 digest authentication.
Service security	User rights	Three user roles: administrator, advanced operator, and common operator
	Security mode	User name and password authentication, 802.1X authentication, and HTTPS digital certificate
	Secure boot	Supported
	System intrusion detection	Supported


Port	
Storage port	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Alarm port	2 input ports and 1 output port
Network port	One RJ45 10M/100M adaptive Ethernet port
Communication serial port	RS-485 port
Audio port	Supported (one-channel LINE IN or one-channel external MIC)/Supported (one-channel LINE OUT)



General Specifications	
Power type	12 V DC and PoE (IEEE 802.3af)
Power consumption	Maximum: 10 W; typical: 5 W
Operating temperature	-30°C to +60°C (illuminator disabled) -30°C to +40°C (illuminator enabled)
Operating humidity	5% to 95% (non-condensing)
Surge protection	4 kV
IP rating	IP67
Equipment Anti Corrosion	Class C corrosion resistance
IK rating	IK10
Weight	Net weight 1.4 kg;Gross weight 1.8 kg
Dimensions	Device dimensions 330.4mm×108.6mm×92mm;Package dimensions 182 mm x 376 mm x 139 mm



Dimensions

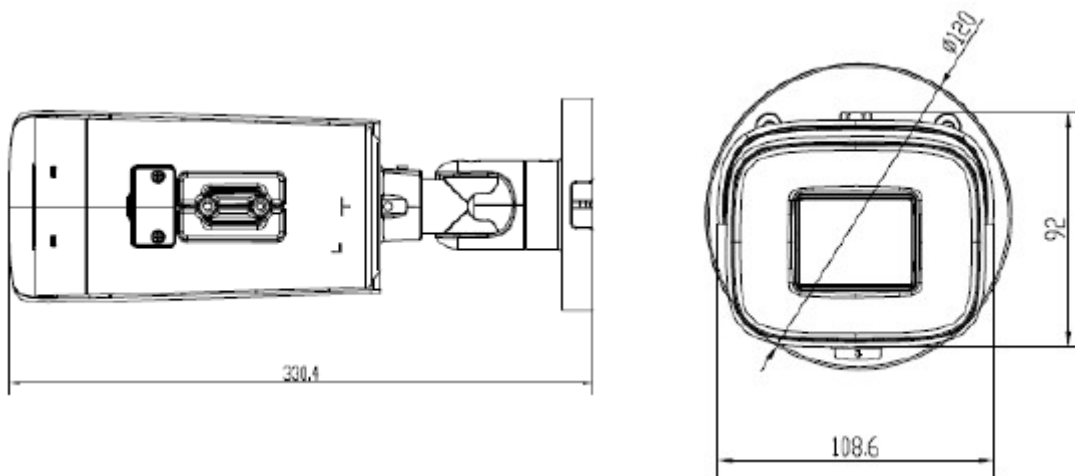

Recommended Accessories



ACC3213



ACC3231

HOLOWITS Contact

Address : 6 Temasek Boulevard, 29th Floor, Suntec Tower Four, Singapore
038986

Web : www.hollowits.com

Copyright 2022. All rights reserved © HOLOWITS TECHNOLOGIES PTE. LTD.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of HOLOWITS TECHNOLOGIES PTE. LTD.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purposes only and constitutes neither an offer nor an acceptance. HOLOWITS may change the information at any time without notice.



Product selector

Scan the QR code on the right to view and compare specifications of HOLOWITS products and select the best camera for you.