

HWT-D2120-10-LI-SV

1T2MP IR/White-Light AI Bullet Camera
with Intercom



☰ Features

- ▶ 1TOPS computing power
- ▶ Supports multi-algorithm switchover, behavior analysis, crowd flow analysis, target detection, person detection, object (motor vehicle, non-motorized vehicle, and pedestrian) classification, vehicle recognition, vehicle event detection, and traffic flow statistics
- ▶ Supports backlight adaptation and overcast adaptation
- ▶ 1/2.7" CMOS sensor
- ▶ Online loading and upgrade of algorithms
- ▶ 120 dB super wide dynamic range (WDR), ensuring that both foreground and background objects are clearly identified in environments with sharp light contrast
- ▶ Supports intelligent infrared/white-light compensation
- ▶ Built-in dual microphones and speaker for voice intercom
- ▶ Supports voice intercom, alarm-triggered announcement playing, and customized audio files
- ▶ Audible and visual alarm

Technical Specifications

Model		HWT-D2120-10-LI-SV				
Major Specifications						
Main control	Computing power	1TOPS				
	Memory	DDR3 0.5 GB				
	Flash type	EMMC 8192.0 MB				
Camera	Focal length	2.8-12mm				
	Max Aperture	F1.2				
	Image sensor	1/2.7" CMOS/2MP 1920(H)*1080(V)				
	Lens aperture type	Fixed iris				
	Angle of view	35°(T) to 98°(W);Vertical:20°(T) to 52°(W)				
	IR range	50m				
	Illumination distance	30m				
	Digital Zoom/Optical Zoom	16X/4X				
	DORI (Complied to the EN 62676-4)		D(m)	O(m)	R(m)	I(m)
		W	37.3	15.1	7.5	3.7
T		160.0	64.5	32.0	16.0	

Intelligence		
Target/Body	Target	Target detection/Target enhancement/Target attribute recognition
	Target recognition	Supported
	Person	Person detection
Vehicle	Vehicle analysis	Vehicle color/Vehicle type/Vehicle model
	Traffic flow statistics	Motor vehicle/Non-motorized vehicle/Pedestrian
Other intelligences	Behavior analysis	Fast movement/Tripwire crossing/Intrusion/Area entry or exit /Loitering/Battery Vehicle Detection
	Crowd flow analysis	Queue length/Head counting/Crowd flow statistics
	Non-motorized vehicle	Supported
	Multi-algorithm switchover	Supported
	Defocus	Supported
Alarm information	No SD card; SD card full; SD card error; Network disconnection; Defocus detection; IP Address Conflict Detection	

Open ecosystem		
Algorithm openness	Open OS	Supported
Data openness	Data openness	SDK (proprietary protocol)/REST API (proprietary protocol)/GA/T 1400/GB/T 28181 (2011, 2016)/ONVIF Profile S/G/T

Image		
Codec	Video encoding format	MJPEG/H.264/H.265
	Video encoding channels	Triple streams
	Intelligent encoding	Extra265/264
	Video frame rate	60/50/Configurable (25 fps or 30 fps)
Image AI	Scene adaptation	Backlight adaptation/Overcast adaptation

Image ISP

Min illumination	Color: 0.002 lux (F1.2, AGC ON, 1/30s shutter speed); B/W: 0.0005 lux (F1.2, AGC ON, 1/30s shutter speed) or 0 lux (infrared illuminator enabled)
Day/Night mode	Supported; automatic (ICR), color, B/W, and scheduled (default: automatic) Sensitivity level: high (default), medium, and low Image triggering/Internal triggering
WDR	120dB
White balance	Auto/Manual/OnePush
HLC/BLC	Supported/Supported
Digital noise reduction	2D/3D noise reduction
Shutter speed	Supports slow shutter; Slow shutter speed levels: 1/3s, 1/4s, 1/8s, 1/12s, 1/15s; Non-slow shutter speed levels: 1/25s, 1/30s, 1/50s, 1/60s, 1/90s, 1/100s, 1/120s, 1/125s, 1/180s, 1/250s, 1/350s, 1/500s, 1/725s, 1/1000s, 1/1500s, 1/2000s, 1/3000s, 1/4000s, 1/6000s, 1/10000s, 1/30000s, 1/100000s, and customized; Face checkpoint: 1/25s; Micro checkpoint: 1/250s; Behavior analysis: 1/25s
Signal-to-Noise Ratio(SNR)	> 45 dB
Primary stream resolution	1920×1080(1080P),1280×720(720P)
Secondary stream resolution	Secondary stream 1: 1920 x 1080 (1080p), 1280 x 720 (720p), 720 x 576 (PAL), 720 x 480 (NTSC) Secondary stream 2: 720 x 576 (PAL), 720 x 480 (NTSC), 352 x 288 (PAL), 352 x 240 (NTSC)
Video bit rate	Only for H.264 and H.265: 1080p to 4K: 512 kbit/s to 16 Mbit/s 720p: 384 kbit/s to 8 Mbit/s D1: 256 kbit/s to 4 Mbit/s CIF: 32 kbit/s to 1 Mbit/s
Smart Illumination	Not Supported
Optical Defogging/Algorithm-assisted Defogging	Not Supported/Supported
EIS	Supported; Sensitivity levels are not supported.

Audio

Audio	Audio Encoding Format	G.711a/G.711u/G.726/OPUS/AAC
	Audio sampling rate	G.711a/G.711u/G.726: 8 kHz OPUS: 8/12/16/24/48 kHz G.711a/G.711u: 64 kbit/s
	Audio bit rate	G.726: configurable (16/24/32/40 kbit/s) OPUS: configurable (16/24/32/40/64/96/128/160/192/224/256/288 kbit/s)

Networking


Network transmission	Protocols supported by IPv4	TCP, UDP, IPv4, DHCP, DNS, ICMP, IGMP, HTTPS, FTP, SFTP, RTP, RTSP, RTCP, SIP, ARP, SSL, NTP, SNMP (V1/V2/V3), 802.1X, QoS, and PPPoE Note: 1. The northbound protocol should adapt to the PPPoE dialup scenario.
	Protocols supported by IPv6	HTTPS,RTP,RTCP,RTSP,Onvif,IPv6,ICMPv6,DHCPv6

Security		
Data security	Media security	Supports web- or SDK-based media stream encryption; supports a maximum of two channels of encrypted media streams; media stream encryption and full intelligence, target recognition, or image upload through SFTP/FTP cannot be enabled at the same time; after the intelligent analysis function is enabled, only one-channel stream encryption is supported; supports encrypted data storage on SD cards.
	Video digital watermark	Supported
	Image digital watermark	Supported
Service security	User rights	Three user roles: administrator, advanced operator, and common operator
	Security mode	User name and password authentication, 802.1X authentication, and HTTPS digital certificate
	Secure boot	Supported
	System intrusion detection	Supported

Port	
Storage port	Provides one microSD card slot that supports microSDHC/microSDXC (maximum memory card capacity: 256 GB).
Alarm port	2 input port and 1 output port
Network port	One RJ45 10M/100M adaptive Ethernet port
Communication serial port	RS-485 port
Audio port	Supported (2-channel built-in MIC)/Supported (one-channel LINE OUT or one-channel speaker)

General Specifications	
Power type	DC12V,PoE(IEEE 802.3at)
Power consumption	Maximum:12.8W,typical:3.2W
Operating temperature	-30°C to 60°C
Operating humidity	5% to 95%(non-condensing)
Surge protection	4kV
IP rating	IP67
Equipment Anti Corrosion	Class C corrosion resistance
IK rating	IK10
Weight	Net weight 1.0kg;Gross weight 1.2KG
Dimensions	Device dimensions 88mm×107mm×206mm;Package dimensions 115mm×140mm×294mm

Dimensions

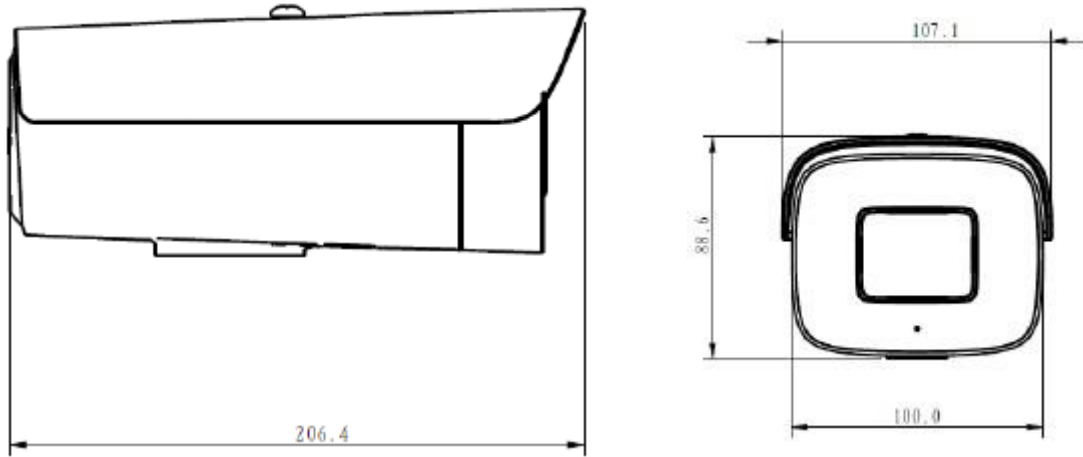

Recommended Accessories



HOLOWITS Contact

Address : 6 Temasek Boulevard, 29th Floor, Suntec Tower Four, Singapore 038986

Web : www.hollowits.com

Copyright 2022. All rights reserved © HOLOWITS TECHNOLOGIES PTE. LTD.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of HOLOWITS TECHNOLOGIES PTE. LTD.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purposes only and constitutes neither an offer nor an acceptance. HOLOWITS may change the information at any time without notice.



Product selector

Scan the QR code on the right to view and compare specifications of HOLOWITS products and select the best camera for you.